

Features

Compatible with Simplex ES Net and 4120 fire alarm networks.

Basic system includes:

- Capacity for up to 1000 addressable IDNet points, and up to 127 VESDA Air Aspiration Systems interface points, with up to 2000 points of Annunciation, and provides up to 20 internal and external card addresses
- Color-coded operator interface with membrane keypad includes 2 x 40 Super-twist LCD display, 3 programmable control keys and 6 programmable LEDs
- CPU assembly includes dedicated compact flash memory for on-site system information storage

Includes an Enhanced System Supply (ESS) that provides power and battery charging (6 A output):

- Dual 3 A on-board IDNAC SLCs (signaling line circuit) provide enhanced power delivery to addressable notification appliances
- With an IDNAC SLC, a constant 29 VDC source voltage is maintained during alarm, even during battery operation, allowing strobes to operate at higher voltage with lower current and ensuring a consistent current draw and voltage drop margin under both primary power and secondary battery standby
- Efficiencies include lower strobe currents, wiring distances up to 2 to 3 times farther than with conventional notification, support for more appliances per IDNAC SLC, ability to use smaller gauge wiring, all providing installation and maintenance savings with high assurance that appliances that operate during normal system testing will operate during worst case alarm conditions
- IDNAC SLCs are compatible with both TrueAlert ES and TrueAlert addressable notification appliances, and remote 4009 IDNAC Repeaters to extend power and wiring distance even farther and extends supervisory capacity by up to 139 additional unit loads or 3 A
- Addressable initiating device control is provided by on-board IDNet 2 dual loop SLCs that provide two electrically isolated channels that support TrueAlarm analog sensors and IDNet communications monitoring and control devices with an electrically isolated output channel allowing use with either shielded or unshielded, twisted or untwisted single pair wiring; and providing dual short circuit isolating output loops
- Battery charger for up to 110 Ah batteries (UL) or up to 50 Ah batteries (ULC). 33 Ah max in control unit cabinet for 1 bay Systems, 50Ah for 2 bay systems.
- 2 A programmable function auxiliary output
- Remote annunciator module support via RUI (Remote Unit Interface) communications port, supports either Class B or Class A operation
- 48 LED panel mount annunciation provides 40 Red and 8 Yellow pluggable LEDs (select models, meets ULC requirements), optional LED kits are available to change individual LED color to Green or Blue to meet specific site requirements

Optional ESS mounted modules include

- City Connect (with or without disconnect switches)
- Alarm Relay Module
- TrueInsight Remote Gateway
- Battery brackets for seismic area protection



Figure 1: 1-Bay Cabinet



Figure 2: 1-Bay Cabinet with LED Annunciation



Figure 3: 2-Bay Cabinet

Optional block space modules include

- Fire Alarm Physical Bridge and Network Interface Cards for ES Net or 4120 Peer-to-Peer fire alarm network communications, supports either Class B or Class X operation
- Ethernet connectivity options include ES Net Network Interface Card, Building Network Interface Card (BNIC), SafeLINC Internet Interface, and BACpac Ethernet Portal
- Dual Class A IDNAC Isolator (DCAI)
- Dual RS-232 Module
- VESDA Air Aspiration High Level Interface
- Serial DACT
- 8 Zone IDC Modules Class A or B
- 4 Point Auxiliary Relay Module
- Additional IDNET addressable channels
- 8-point zone/relay module, each point can be an IDC input or relay output. Class A IDCs require 2 points (one out and one return). Relays rated for 2 A @ 30 VDC (resistive) and configurable as either normally open or normally closed.

* This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 7165-0026:0369 for allowable values and/or conditions concerning material presented in this document. NYC Fire Dept COA #6193. At the time of publication only UL and ULC listings are applicable to ES Net network products. Additional listings may be applicable; contact your local supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products.

Compatible with Simplex remotely located:

- 4098-9757 QuickConnect2 and legacy 4098-9710 QuickConnect TrueAlarm smoke sensors
- 4003EC Small Voice Units
- 4081 Series, 110 Ah Battery Chargers
- 4100-7400 Series Graphic Annunciators
- 4190 Series PC Annunciator
- 4190 Series Fiber Modems and Physical Bridges
- 4606-9102 Remote LCD Annunciator, 4100-9400 Series Remote InfoAlarm Command Centers, and 4602 Series Status Command Units (SCU) and Remote Command Units (RCU) Annunciators
- IP communicator compatibility

4010ES Agency listings

- UL 864 - Control Units, System (UOJZ); Control Unit Accessories, System, Fire Alarm (UOXX); Control Units, Releasing Device Service (SYZV); Smoke Control System Equipment (UUKL)
- UL 1076 - Proprietary Alarm Units (APOU)
- UL 1730 - Smoke Detector Monitors and Accessories (UULH)
- UL 2017 - Emergency Alarm System Control Units, CO detection (FSZI); Process Equipment Management (QVAX)
- ULC-S527 - Control Units, System, Fire Alarm (UOJZC); Control Unit Accessories, System, Fire Alarm (UOXXC); Control Units, Releasing Device Service (SYZVC); Smoke Control System Equipment (UUKLC)
- ULC-S559 - Central Station Fire Alarm System Units (DAYRC)
- CSA 6.19 - Gas Alarms and Accessories (CZHFC)
- ULC/ORD-C1076 - Proprietary Burglar Alarm System Units (APOUC)
- ULC/ORD-C100 - Smoke Control System Equipment, UUKLC

Introduction

4010ES Series Fire Detection and Control Units

4010ES Series Fire Detection and Control Units provide leading edge installation, operator, and service features for customer applications in the mid-range addressable fire alarm systems market. An onboard Ethernet port provides fast external system communications to expedite installation and service activity. Dedicated compact flash memory archiving provides secure on-site system information storage of electronic job configuration files.

Modular design

A variety of functional modules are available to meet specific system requirements. Selections allow control units to be configured for either Stand-Alone or Networked fire control operation.

InfoAlarm Command Center options provide convenient expanded display content (detailed on data sheet **S4010-0009**).

Mechanical Description

- Mounting box provides convenient stud markers for drywall thickness and nail-hole knockouts for quicker mounting
- Smooth box surfaces are provided for locally cutting conduit entrance holes exactly where required
- The hinged User Interface panel easily opens for internal access
- Modules are power-limited (except as noted)
- Doors include tempered glass inserts, boxes and doors are available in platinum or red
- Box and door/retainer assemblies are included with Basic Control Unit assemblies
- Cabinet assemblies are rated NEMA 1 and IP 30
- Cabinet assembly design has been seismic tested and is certified to IBC and CBC standards as well as to ASCE 7 categories A through F, requires battery brackets as detailed on data sheet **S2081-0019**

Control Unit Hardware

The Master Controller and Enhanced System Supply (ESS) are mounted in the upper section of the 4010ES cabinet. Refer to one and two bay loading reference diagrams, [Cabinet One](#) and [Two Bay Loading Reference](#).

4010ES Block Space Option Cards mount to the left of the 4010ES ESS. In 2-bay cabinets block space option cards also mount below the 4010ES ESS.

Other 4010ES Options: The 4010ES City Connect module or the optional Alarm Relay module mount directly to the ESS. These options are mutually exclusive.

The TrueInsight Remote Gateway mounts on the back side of the 4010ES User Interface Panel.

The battery compartment is located in the bottom of the 4010ES cabinet. The cabinet allows for up to 33 Ah battery capacity for 1 bay systems, and 50Ah for 2 bay systems. 50Ah batteries also require the use of 4100-0650 battery shelf.

Software Feature Summary

- TrueAlarm individual analog sensing with front panel information and selection access
- "Dirty" TrueAlarm sensor maintenance alerts, service and status reports including "almost dirty"
- TrueAlarm magnet test indication appears as distinct "test abnormal" message on display when in test mode
- TrueAlarm sensor peak value performance report
- "Install Mode" allows grouping of multiple troubles for uninstalled modules and devices into a single trouble condition
- Module level ground fault searching assists installation and service by locating and isolating modules with grounded wiring
- "Recurring Trouble Filtering" allows the control unit to recognize, process, and log recurring intermittent troubles (such as external wiring ground faults), but only sends a single outbound system trouble to avoid nuisance communications
- WALKTEST silent or audible system test performs an automatic self-resetting test cycle

IDNet Addressable Device Control

Overview

The ESS provides an IDNet 2 addressable device SLC with two isolated loops that supervise wiring connections and the individual device communications status on the SLC. With 2-wire IDNet 2 SLCs, initiation, monitoring, and control devices such as manual fire alarm stations, TrueAlarm sensors, control relays, and sprinkler waterflow switches can communicate their identity and status and receive fire alarm system control. Additional addressable interface modules include circuit isolators, conventional IDC zone adapters, and interface to other system circuits such as fans, dampers, and elevator controls.


IDNet 2 Addressable Device Operation

Each addressable device on the IDNet communication channel is continuously interrogated for status condition such as: normal, off-normal, alarm, supervisory, or trouble. Both Class B and Class A operation is available. Sophisticated poll and response communication techniques ensure supervision integrity and allow for "T-tapping" of the circuits for Class B operation. Devices with LEDs pulse the LED to indicate receipt of a communications poll and can be turned on steady from the control unit. With addressable devices, the location and status of the connected device is monitored, logged, and displayed on the operator interface LCD with each device having its own 40 character custom label for precise identification.

TrueAlarm Addressable Sensor Operation

Addressable initiating device communications include operation of TrueAlarm smoke and temperature sensors. Smoke sensors transmit an output value based on their smoke chamber condition and the CPU maintains a current value, peak value, and an average value for each sensor. Status is determined by comparing the current sensor value to its average value. Tracking this average value as a continuously shifting reference point filters out environmental factors that cause shifts in sensitivity.

Table 1: TrueAlarm Addressable Sensor Reference

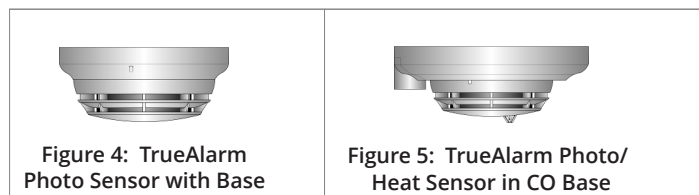

Programmable sensitivity of each sensor can be selected at the control unit for different levels of smoke obscuration (shown directly in percent) or for specific heat detection levels. To evaluate whether the sensitivity should be revised, the peak value is stored in memory and can be easily read (or downloaded as a report) and compared to the alarm threshold directly in percent.

CO sensor bases combine an electrolytic CO sensing module with a TrueAlarm analog sensor to provide a single multiple sensing assembly using one system address. The CO sensor can be enabled/disabled, and can be used in LED/Switch modes and custom control. (refer to data sheet *S4098-0052* for details)

TrueAlarm heat sensors can be selected for fixed temperature detection, with or without rate-of-rise detection. Utility temperature sensing is also available, typically to provide freeze warnings or alert to HVAC system problems. Readings can be selected as either Fahrenheit or Celsius.

TrueSense Early Fire Detection Multi-sensor 4098-9754 provides photoelectric and heat sensor data using a single 4010ES IDNet address. The control unit evaluates smoke activity, heat activity, and their combination, to provide TrueSense early detection. For more details on this operation, refer to data sheet *S4098-0024*.

Diagnostics and Default Device Type

Sensor Status TrueAlarm operation allows the control unit to automatically indicate when a sensor is almost dirty, dirty, and excessively dirty. The NFPA 72 requirement for a test of the sensitivity range of the sensors is fulfilled by the ability of TrueAlarm operation to maintain the sensitivity level of each sensor. CO Sensors track their 10 year active life status providing indicators to assist with service planning. Indicators occur at: 1 year, 6 months, and end of life.

Modular TrueAlarm sensors use the same base and different sensor types (smoke or heat sensor) and can be easily interchanged to meet specific location requirements. This allows intentional sensor substitution during building construction when conditions are temporarily dusty. Instead of covering smoke sensors (causing them to be disabled), heat sensors may be installed without reprogramming the control unit. The control unit will indicate an incorrect sensor type, but the heat sensor will operate at a default sensitivity to provide heat detection for building protection at that location.

IDNet Device Wiring Reference

IDNet Addressable Channel Capacity. IDNet 2 SLCs support up to 250 addressable monitor and control devices intermixed on the same pair of wires. The ESS IDNet 2 provides two electrically isolated SLCs, and IDNet 2+2 provides four isolated SLCs that are isolated from other system reference voltages to reduce common mode noise interaction with adjacent system wiring.


Table 2: IDNet 2 and IDNet 2+2 SLC Wiring Specifications

Specification		Rating
Maximum Distance from Control Unit per Device Load	0 to 125	4000 ft (1219 m); 50 ohms
	126-250	2500 feet (762 m); 35 ohms
Total Wire Length Allowed With "T" Taps for Class B Wiring		Up to 12,500 ft (3.8 km); 0.60 μ F
Maximum Capacitance Between IDNet Channels		1 μ F
Loading per device		0.8 mA supv., 1 mA alarm; 2 mA per activated device LED
Wire Type and Connections		Shielded or unshielded, twisted or untwisted wire*
Connections		Terminal blocks for 18 to 12 AWG
Compatibility includes: IDNet communicating devices and TrueAlarm sensors including QuickConnect and QuickConnect2 sensors; see data sheet <i>S4090-0011</i> for additional reference		
* Some applications may require shielded wiring. Review your system with your local Simplex product supplier.		

IDNAC SLC Control of TrueAlert and TrueAlert ES Addressable Notification

Addressable notification appliance communications include operation of TrueAlert and TrueAlert ES Visible only (V/O, strobe), Audible only (A/O, horn), Audible/Visible (A/V, horn/strobe), and strobes of Speaker/Visible (S/V) notification appliances. (S/V appliances require separate speaker wiring.) IDNAC SLC addressable communications allow each horn and strobe to be individually controlled using a single two-wire circuit, confirms the wiring connections to the individual notification appliance's electronic circuit, and confirms communications between each appliance and the fire alarm control unit. Addressable communications increases supervision integrity versus conventional notification systems by providing supervision beyond the circuit wiring to each individual appliance and by constantly verifying the ability of each appliance to communicate with the control unit.

Table 3: TrueAlert ES Addressable Appliance Reference

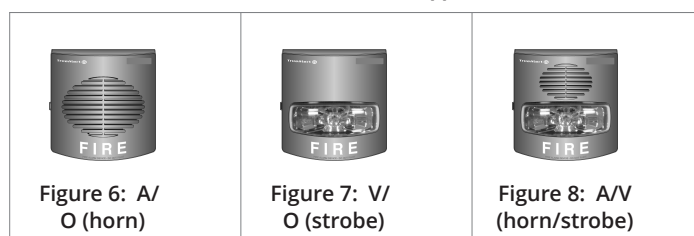

Individual Appliance Status and Settings

The fire alarm control unit monitors and records each addressable notification appliance status, type of appliance, and its configured appliance settings. A fault in any individual appliance automatically reports a trouble condition to the control unit.

Virtual NACs Provide Control Convenience

For control convenience, IDNAC notification appliances can be grouped into Virtual NACs (VNACs) for group control, grouping that can be made across SLCs, not defined by their wiring connection.

Panel Control Convenience

Applicable operation settings for each appliance can be programmed without having to replace appliances or remove them from the wall or ceiling. An appliance's VNAC notification zone can be easily changed through programming without having to add additional circuits, conduit, and wiring. Audible and visible appliances for non-Fire Emergency Communications notification can be programmed to operate separately on the same pair of wires as the fire alarm notification appliances. The

result is lower installation, retrofit, and overall life-cycle cost of ownership compared with traditional conventional notification systems.

Installation, Retrofit, and Life-Cycle Cost Benefits

With each addressable appliance capable of being controlled separately on the same two-wire IDNAC SLC, installation time and expense for both retrofit and new construction can be significantly reduced. When Class B wiring is used, wiring can be "T-tapped" allowing more savings in distance, wire, conduit (size and utilization), and overall installation efficiency.

Location Information, Diagnostics and Troubleshooting

Each addressable notification appliance has its own 40 character custom label to identify the location of the appliance and to aid in troubleshooting fault conditions. In conventional notification systems, conventional appliances are not capable of communicating with the control unit. Fault reporting on a conventional system is limited to the circuit wiring and the entire area (zone) covered by appliances on the notification appliance circuit (NAC) making it much more difficult and costly to locate and correct the source of a problem. Using the TrueAlert magnet test allows each appliance to individually identify its candela setting and address and to briefly operate if desired, and using the TrueAlert ES Appliance Self-Test feature provides detailed performance verification per appliance.

TrueAlert ES Appliance Self-Test Operation

On-Board Test Sensors. TrueAlert ES appliances are equipped with on-board sensors to detect strobe and/or horn output allowing efficient and unobtrusive Self-Testing. When **Automatic Self-Test** is initiated from the control unit, each appliance within the selected VNAC group will briefly operate and then report its Self-Test status to the control unit, all within several seconds. Silent Self-Test can be selected to test only visible appliance if desired. The control unit is in a trouble condition during testing and in the event of an alarm, Self-Test is automatically terminated. **Additionally, Automatic Self-Test can be scheduled** to occur at a convenient time on a regular basis.

Automatic Self-Test results are communicated to the control unit with a time and date stamp and are stored in memory. Results are viewable at the front panel display and printed reports can be generated from the control unit service port.

Individual Self-Test is selected from the control unit when individual appliances need to be observed to operate. Each appliance in the selected VNAC group will turn on its LED until individually activated by applying a magnet. After performing the individual test, the appliance LED turns off to indicate completion. Results are recorded the same as during the automatic test.

IDNAC SLC Hardware Reference

The Enhanced System Supply provides two, 3 A IDNAC SLCs for control and power to TrueAlert ES and TrueAlert addressable notification appliances. Both power supplies incorporate an efficient switching design that provides a regulated output of 29 VDC, even during battery operation. With 29 VDC minimum output at the control unit, addressable notification SLCs can support wiring distances 2 to 3 times farther than available with conventional notification, or support more appliances per SLC, or work with smaller gauge wiring, or combinations of these benefits. The result is installation and maintenance savings with high assurance that appliances that operate during normal system testing will operate during worst case alarm conditions.

IDNAC SLC Appliance Wiring Reference

IDNAC SLC Capacity

Up to 127 addresses and up to 139 unit loads (appliances are typically one unit load, devices such as Isolators may require more than one load, refer to individual device data sheet for specific information.

Table 4: IDNAC SLC Appliance Wiring Reference

Wiring Reference	Description
Recommended Wire Type	UTP, unshielded twisted pair
Maximum wire length allowed with "T-Taps" for Class B wiring, per SLC	10,000 ft (3048 m)
Maximum wire length per SLC to any appliance	4000 ft (1219 m)
Appliance Supervisory Current	1 unit load = 0.8 mA per appliance
Wiring Connections	Terminals for 20 to 12 AWG

Master Controller (CPU)

- The 4010ES Master Controller includes dedicated 2GB compact flash Mass Storage memory for on-site system information storage and convenient Ethernet service port access
- Convenient front panel accessed Ethernet port for quick and easy download of site-specific programming and firmware enhancements. Firmware enhancements are made via software downloads to the on-board flash memory
- Every downloaded job is automatically stored to Compact flash without overwriting earlier versions providing a means for recovering previous configurations
- Downtime is reduced because the system stays running during download
- Modifications can be uploaded as well as downloaded for greater service flexibility
- Mass Storage allows job specific files to be stored in the control unit such as test and inspection reports, record drawings, specifications, and more
- Ethernet connectivity options include ES Net Network Interface Card , Building Network Interface Card (BNIC) and SafeLINC Internet Interface
- RUI (Remote Unit Interface) communications port supports either Class B or Class A operation for remote annunciation equipment

Operator Interface Features

Operator Interface Features

- Convenient and extensive operator information is provided using a logical, menu-driven display
- Multiple automatic and manual diagnostics for maintenance reduction
- Convenient PC programmer label editing
- Password access control
- Alarm and Trouble History Logs (up to 2000 total events) are available for viewing from the LCD, or capable of being printed to a connected printer, or downloaded to a service computer

Convenient Status Information

With the locking door closed, the glass window allows viewing of the display, status LEDs, and available operator switches. Features include a two-line by 40-character, wide viewing angle (super-twist) LCD with status LEDs and switches as shown.

LED indicators describe the general category of activity being displayed with the LCD providing more detail. For the authorized user, unlocking the door provides access to the control switches and allows further inquiry by scrolling the display for additional detail.

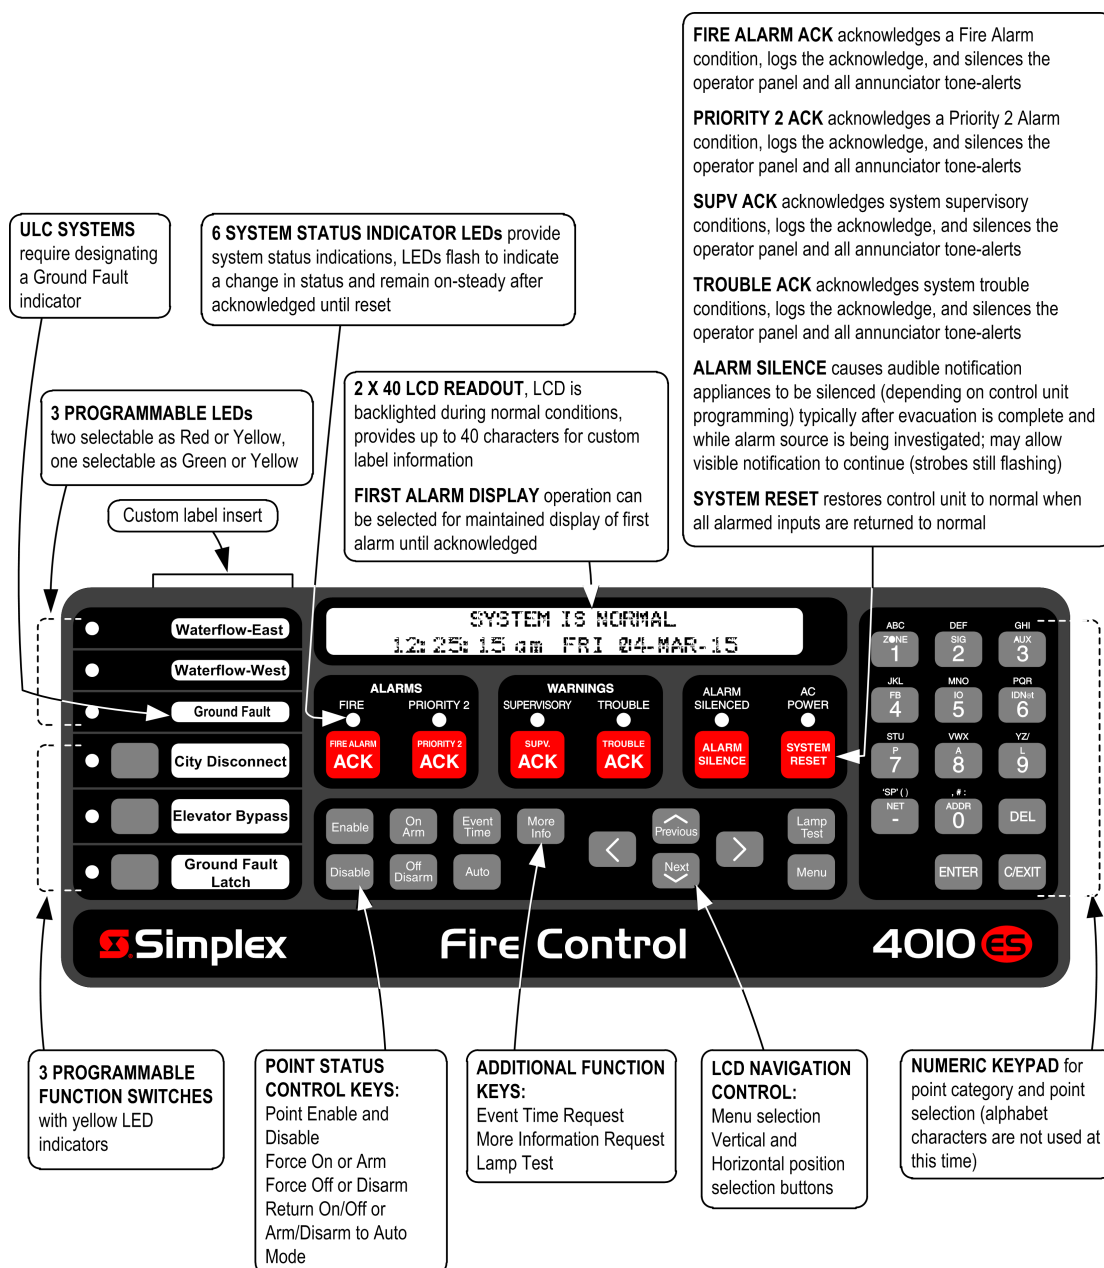


Figure 9: Primary functions of the operator interface

Basic Control Unit Description

4010ES control units with ESS include:

- An Operator Interface, Master Controller with 2 GB Compact Flash, IDNet2 addressable device SLC(s) with short circuit isolating loops configurable for Class B or Class A operation, and 6 A Enhanced System Supply (ESS)
- RUI Class B or Class A communications port for remote annunciation devices
- Support for up to 20 internal and external card addresses
- Other standard features may be provided depending on model (see model selection below for additional details on specific models)
- Cabinet and door

6 A Enhanced System Supply details

- Two, 3 A Class B IDNAC SLCs; Class A operation is available using the 4010-9930 Dual Class A IDNAC Isolator (DCAI) module
- Up to 2 A of auxiliary power
- 110 Ah (UL)/50 Ah (ULC) battery charger (33 Ah max in 1 bay cabinet, 50 Ah max with 4100-0650 battery shelf in two bay control cabinet)
- Selectable low battery cutout operation
- Low Battery Voltage Cutout is selectable when required (required for ULC listing applications)
- 2 A Auxiliary Output (AUX/SNAC) can be selected either as resettable auxiliary power of 2 A @ 24 VDC, or selected to be a simple NAC (SNAC) for non synchronous 24 VDC reverse polarity NAC operation

8-Point Zone/Relay Module Details

- **Select as IDC or Relay:** configure up to 8, Class B IDCs, or up to 4, Class A IDCs; or up to 8, Relay outputs rated 2 A resistive @ 30 VDC (N.O. or N.C.); or combinations of IDCs and Relays; each zone is separately configurable as an IDC or Relay output
- **IDC Support.** Each IDC supports up to 30, two-wire devices. Zone relay modules may be powered directly from the control unit power supply or through the optional 25 VDC regulator module where required for 2-wire detector compatibility (refer to 2-Wire Detector Compatibility document 579-832 for additional details).
- **IDC EOL resistor values are selectable as:** 3.3 kΩ, 2 kΩ, 2.2 kΩ, 3.4 kΩ, 3.9 kΩ, 4.7 kΩ, 5.1 kΩ, 5.6 kΩ, 6.34/6.8 kΩ, and 3.6 kΩ + 1.1 kΩ; see instructions for more details

Basic Control Unit Model Selection – 1 Bay Control Unit

Table 5: Basic Control Unit Model Selection – 1 Bay Control Unit

SKU*	Color	Language & Voltage	Listings	Features	Supv. Current	Alarm Current	Available Option Blocks
4010-9601	Red	English 120 VAC	UL, CSFM, FM	Basic 1-bay control unit with 2x40 LCD Operator Interface, 6 A ESS/battery charger, (1) Two-loop Isolated IDNet 2 Communications Channel, Class A or Class B, with support for up to 250 addressable devices; and two, 3 A IDNAC SLCs	336 mA	540 mA	3 4"x5" blocks
4010-9602 4010-9602BA	Platinum						
4010-9603	Red						
4010-9604	Platinum		UL, ULC, CSFM, FM	Same features as above with 48 LED annunciation; alarm current includes 24 annunciator LEDs activated	356 mA	605 mA	
4010-9606	Platinum	French 120 VAC					

Note: * Model numbers ending in -BA are assembled in the USA.

Current Notes:

1. Basic control unit current does not subtract from the 6 A output rating.
2. Supervisory and alarm current specifications are for determining battery standby requirements.
3. Current specifications include an active RUI channel.
4. IDNet channel device current is not included; refer to Table 7 for details. Control unit current assumes 20 LEDs activated in alarm on each IDNet channel.
5. IDNAC channel notification appliance current is not included.

Basic Control Unit Model Selection - 2 Bay Control Units

Note: Supervisory and Alarm current specifications are for determining battery standby requirements. Current specifications include an active RUI channel. Models with IDNet channels include 20 IDNet device LEDs activated in alarm per channel. Actual IDNet current is not included.

Table 6: Basic Control Unit Model Selection - 2 Bay Control Units

SKU*	Color	Language & Voltage	Listings	Features	Available Option Blocks	Supv. Current	Alarm Current
4010-9621	Red	English 120 VAC	, ULC, UL, CSFM, FM	Basic control unit with 2x40 LCD Operator Interface, 6 A ESS/battery charger, (1) Two-loop Isolated IDNet 2 Communications Channel and (1) Four-loop Isolated IDNet 2+2 Communications Module, Class A or Class B, with support for up to 500 addressable IDNet points; and two, 3 A, Class B, IDNAC SLCs with support for up to 254 addressable notification appliances	10 4"x5" blocks	386 mA	640 mA
4010-9621BA							
4010-9622	Platinum						
4010-9622BA							
4010-9609	Red	French 120 VAC	UL, ULC, CSFM, FM	Same features as above with 48 LED annunciation; alarm current includes 24 annunciator LEDs activated		406 mA	705 mA
4010-9610	Platinum						
4010-9608	Platinum						
4010-9623	Red	English 120 VAC	, ULC,UL, CSFM, FM	Basic control unit with InfoAlarm Operator Interface, 6 A ESS/battery charger, (1) Two-loop Isolated IDNet 2 Communications Channel and (1) Four-loop Isolated IDNet 2+2 Communications Module, Class A or Class B, with support for up to 500 addressable IDNet points; and two, 3 A, Class B, IDNAC SLCs with support for up to 254 addressable notification appliances		468mA	706mA
4010-9623BA							
4010-9624	Platinum		, ULC, UL, CSFM, FM				
4010-9624BA							

Note: * Model numbers ending in -BA are assembled in the USA.

Current Notes

1. Basic control unit current does not subtract from the 6 A output rating.
2. Supervisory and alarm current specifications are for determining battery standby requirements.
3. Current specifications include an active RUI channel.
4. IDNet channel device current is not included; refer to Table 7 for details. Control unit current assumes 20 LEDs activated in alarm on each IDNet channel.
5. IDNAC channel notification appliance current is not included.

Addressable Device Load Specifications for Battery Standby

Table 7: Addressable Device Load Specifications for Battery Standby

Addressable Channel Loading Reference	Device Load	Supervisory Current	Alarm Current
IDNet 2 and IDNet 2+2 Communications Channel Output	for every 50 Devices	40 mA	1 mA per device in alarm; 2 mA per activated device LED
IDNAC Communications Channel Output	for every 50 Appliances		Calculate per selected appliances

Block Space Option Card Selection

Note: Maximum block option module quantities may require 2 bay cabinets, 1 bay cabinets are limited to 3 option block spaces total. Refer to diagrams for [Option Module availability](#). Supervisory and Alarm current specifications are for determining battery standby requirements.

Table 8: Single Block Option Modules

Model	Features	Supervisory Current	Alarm Current	Option Block Usage
4010-9912	Serial DACT, includes 2, 2080-9047 cables, 14 ft (4.3 m) long, RJ45 plug and spade lugs	30 mA	40 mA	1 block (must mount in top bay, block D)
4010-9908	4 Point Aux Relay Module	15 mA	60 mA	1 block (3 maximum)
4010-9916	Voltage Regulator Module, 22.8 to 26.4 VDC (25 VDC nominal); isolated and resettable output; includes earth detection circuit and trouble relay for status monitoring	3 A maximum with 2.5 A load	4.9 A maximum with 4 A load	1 block (1 maximum)
4010-9918	Dual RS-232 Module	60 mA	60 mA	1 block (3 maximum)
4010-9930	Dual Class A IDNAC Isolator (DCAI); converts a single Class B IDNAC SLC input to two Class A or two Class B SLC outputs; provides short circuit isolation between each Class A or B output circuit; requires up to two IDNAC addresses; the total current remains controlled by the Class B input source SLC at 3 A maximum; select up to 2 per IDNAC SLC; each isolated loop supports up to 30 device addresses (note: up to 30 additional device addresses may be installed between each 4905-9929 TrueAlert Addressable Isolator+ Module, not to exceed the maximum address and unit loading specifications for the IDNAC channel)	8.3 mA	18.5 mA	1 block, (4 maximum, 2 per IDNAC channel), 1 can be mounted on the ESS
4010-9915	BACpac Ethernet Portal Module; requires 4010-9918 RS-232 Module (no address required)	123 mA		1 block (3 maximum)
4010-9901	VESDA HLI	60 mA	60 mA	1 block (1 maximum)
4010-9929	IDNet 2+2 Module, 250 point capacity; electrically isolated output with four short circuit isolating Class B or Class A output loops; alarm currents for 50 and above devices includes 20 device LEDs in alarm; see above for individual device currents	No device	50 mA	1 block (3 maximum)
		50 devices	90 mA	
		125 devices	150 mA	
		250 devices	250 mA	

Table 8: Single Block Option Modules

Model	Features	Supervisory Current	Alarm Current	Option Block Usage
4010-9935	8 point zone/relay 4x5" flat module. Mounts in any open block in a master controller or expansion bay. Alarm current shown is for 8 Class B IDCs using 3.3K end-of-line-resistors with 4 IDCs in alarm and 4 IDCs in standby. Standby current shown is for all 8 IDCs in standby. Detector current is added separately. Refer to 579-1236 Zone/Relay Module Installation Instructions for more information.	83 mA	351 mA	1 block (11 maximum)
4010-6305	25V regulator harness for 8 point zone/relay module. One required for each 8 point zone/relay module to be powered by the 4010-9916 25V regulator module. A maximum quantity of five 8 point zone/relay modules can be powered from the 4010-9916 25V regulator module.	N/A		

Table 9: Dual Vertical Block (Flat) Modules**

Model	Features	Option Block Usage	Supervisory Current	Alarm Current
4010-9928	For 1-bay control units only: Dual Vertical Block Card Mounting Kit, allows selecting two, dual Vertical Block (flat) modules from the list below; mounts at right angle to chassis (note block usage details)	2 Vertical Blocks (1 max, mounts in top bay, block space A & B only)	NA	
4010-9923	SafeLINC Internet Interface	2 Vertical Blocks (1 max)	115 mA	

Note: * UL, ULC, and CSFM listed.

Note: **For details on other dual vertical block network options refer to data sheets S4100-0029, S4100-0056, S4100-0057, S4100-0076, and S4100-0061

Network Interface and Network Media Card Product Selection

4010ES fire alarm control units are compatible with Simplex ES Net network or 4120 network fire alarm products.

- Refer to datasheet S4100-0076 for additional information on compatible ES Net fire alarm products.
- Refer to datasheet S4100-0056 for additional information on compatible 4120 network fire alarm products.
- Refer to datasheet S4100-0061 for additional information on the Building Network Interface Card.


Additional Control Unit Option Selection

Table 10: Additional Control Unit Option Selection when block space is not used

Model	Features	Supervisory Current	Alarm Current	Mounting Requirements
4010-9909	City Connect Module w/ disconnect switches	20 mA	36 mA	Select one maximum, mounts on ESS (1 maximum)
4010-9910	City Connect Module		37 mA	
4010-9911	Alarm Relay Module	15 mA	37 mA	
4190-6105 *	TrueInsight Remote Gateway	62 mA	62 mA	Mounts on the back of the 4010ES user interface panel
4100-5128	Battery Distribution Terminal Block, mounts to side of box, required when battery connection leaves the 4010ES box (also used in the 4100ES fire alarm control unit)			

Note: * Refer to data sheet S4100-0063 and contact your local Simplex product representative for more details.

Cabinet Dimension Reference

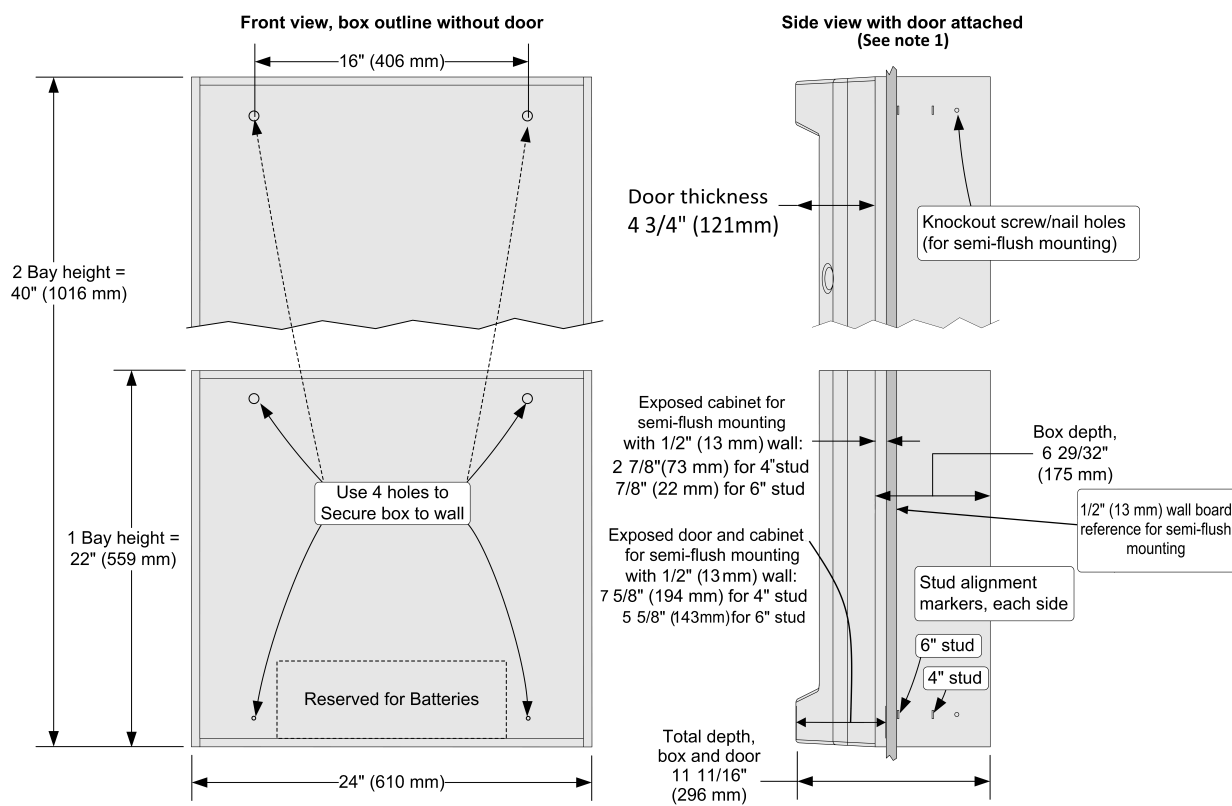

Note: 1. Side View dimensions are shown with minimal cabinet and door protrusion from the exterior wall. For 6 inch stud construction with minimum protrusion shown, the door will open 90 degrees. To allow the door to open 180 degrees, the exposed cabinet dimension from the exterior wall must be a minimum of 3 inches (76 mm) for both 4 inch and 6 inch stud construction.

Cabinet One and Two Bay Loading Reference

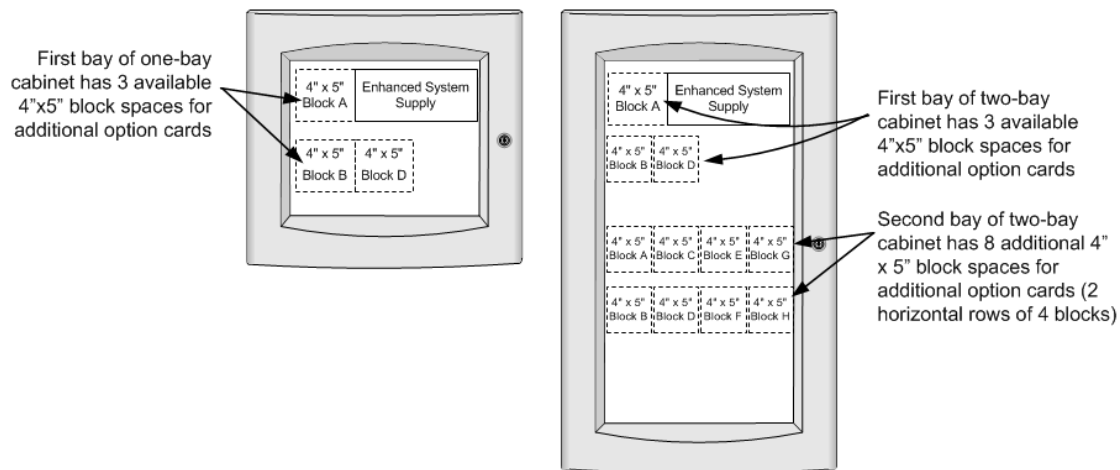


Figure 10: Cabinet One and Two Bay Loading Reference

Miscellaneous Accessories

Table 11: LED Kits (LEDs are pluggable, use to change color for local application requirements)

Model	Description
4100-9843	8 Yellow LED Kit
4100-9844	8 Green LED Kit
4100-9845	8 Red LED Kit
4100-9855	8 Blue LED Kit

Table 12: End User Programming Tools

Model	Description
4100-8802	End User Programming Unit Software
4100-0292	Custom Label Editing (USB Dongle)
4100-0295	Port Vectoring Setup and Control (USB Dongle)
4100-0296	Access Level/Passcode Editing (USB Dongle)
4100-0298	WalkTest Configuration Setup and Control (USB Dongle)

Table 13: Factory Programming Options

Model	Description
4010-8810	Factory Programming (select)
4010-0831	Custom Labels and Programming (requires 4010-8810)

4010ES Card Address Allocation

The 4010ES has a maximum Internal and External Card Address Limit of 20 Card Addresses. Use the Table below to calculate 4010ES card address allocation.

Below is a list of 4010ES equipment and the quantity of card addresses they consume:

1. For the applicable control unit, write in the Card Address Consumption value in the Card Address Allocation column. (Note: Only select 1 control unit)
2. For the option cards to be installed on the 4010ES, write in the Card Address Consumption value in the Card Address Allocation column.
3. Total the Card Address Allocation column (total must not exceed 20).

Table 14: 4010ES Card Address Allocation

Model	Description	Card Address Consumption	Card Address Allocation	Notes
Control Units (Select One)				
4010-9601	2x40 display, (1) IDNet 2 communications channel, single bay box	2		
4010-9602				
4010-9602BA				
4010-9603	2x40 display, (1) IDNet 2 communications channel; 48 pluggable LED module, single bay box	3		
4010-9604				
4010-9606				
4010-9621	2x40 display, (1) IDNet 2 and (1) IDNet 2+2 communications channel, two bay box	4		
4010-9621BA	2x40 display, (1) IDNet 2 and (1) IDNet 2+2 communications channel, two bay box			
4010-9622	2x40 display, (1) IDNet 2 and (1) IDNet 2+2 communications channel, two bay box			
4010-9622BA	2x40 display, (1) IDNet 2 and (1) IDNet 2+2 communications channel, 48 pluggable LED module, two bay box	4		
4010-9609				
4010-9610				
4010-9608				
4010-9623				
4010-9623BA	InfoAlarm display, (1) IDNet 2 and (1) IDNet 2+2 communications channel, two bay box			
4010-9624				
4010-9624BA				
Control Unit Option Cards (Select As Required)				
4010-9901	Flat VESDA HLI Card	1		
4010-9922	Flat 4120 Network Interface Card			
4010-6310	Flat ES Net Network Interface Card			
4010-9908	4 Point Flat Aux Relay Module			
4010-9912	Serial DACT			
4010-9923	SafeLINC Internet Interface Card			
4010-9914	Building Network Interface Card			
4010-9918	Dual RS-232 Module			
4010-9935	8 point zone/relay 4x5" flat module			
4010-9929	IDNet 2+2 Communications Module			
4190-6105	TrueInsight Remote Gateway			
Remote Annunciation (Select As Required)				
4100-9401	Red Cabinet, English	2		
4100-9403	Platinum Cabinet, English			
4100-9441	Red Cabinet, with blank inserts for key labels			
4100-9443	Platinum Cabinet, with blank inserts for key labels			
4606-9102	4010ES RUI LCD Annunciator, English	1		
4602-9101	Status Command Unit (SCU) LED Annunciator			
4602-9102	Remote Command Unit (RCU) LED Annunciator w/control			
4602-9150	Graphic I/O RCU/SCU Assembly for custom annunciator			
4602-7101	Graphic I/O RCU/SCU Assembly for custom annunciator			
4602-7001	RCU for cabinet mount			
4602-6001	SCU for cabinet mount			
4100-7401	24 Point I/O Graphic Module for custom annunciator			
4100-7402	64/64 LED Switch Controller for custom annunciator			
4100-7403	32 Point LED Driver Module for custom annunciator			
4100-7404	32 Point Switch Input Module for custom annunciator			
	Total Card Addresses (Not to Exceed 20)		TOTAL	

General Specifications

AC Input Current	120 VAC Models	4 A maximum, 120 VAC @ 60 Hz nominal	
Battery Current	9 A maximum @ 24 VDC (during battery operation)		
ESS Power Supply Output Ratings	Power Supply Output Rating	6 A output for "Special Application" appliances Note: The 6 A output rating of the ESS was determined such that optional module currents, and external device and appliance currents can be directly added together, not to exceed 6 A total.	Output switches to battery backup during mains AC failure or brownout conditions
	IDNAC SLC Ratings	3 A, regulated 29 VDC during Alarm, 127 addresses, 139 unit loads; DC-DC converter circuit is >92% efficient over operating range	
	IDNAC SLC Wiring	Output terminals are rated for 20 to 12 AWG with duplicate output terminals rated for two wires each, allowing up to four (4) Class B branch circuit T-taps to be made in the cabinet; additional T-taps may be made in external wiring junction cabinets or boxes	
	Auxiliary Power Tap	2 A maximum, rated 19.1 to 31.1 VDC	
Compatible Special Application Appliances		Simplex TrueAlert ES and TrueAlert addressable notification appliances; contact your Simplex product representative for compatible appliances	
Battery Charger Rating (sealed lead acid batteries)	Battery capacity range	UL listed for battery charging of 6.2 Ah up to 110 Ah; ULC listed for charging up to 50 Ah batteries; For 1 bay cabinets, battery capacity above 33 Ah requires a separate cabinet. For 2 bay cabinets, battery capacity above 50 Ah requires a separate cabinet. See data sheet 2081-0012 for further details.	
	Charger characteristics and performance	Temperature compensated, dual rate, recharges depleted batteries within 48 hours per UL Standard 864	
Environmental	Operating Temperature	32° to 120°F (0° to 49° C)	
	Operating Humidity	Up to 93% RH, non-condensing @ 90° F (32° C) maximum	
Additional Technical Reference	Installation Instructions	579-1150	
	Operating Instructions	579-969	

Additional Compatible Equipment and Reference

Table 15: Additional Compatible Equipment and Reference

Subject	Data Sheet
Serial DACT (SDACT) for 4100ES, 4010ES, 4007ES	S2080-0009
Seismic Battery Brackets Reference	S2081-0019
4003EC Voice Control Unit	S4003-0002
4009 IDNet NAC Extender	S4009-0002
4009 IDNAC Repeater	S4009-0004
4010ES Panels with Conventional Notification	S4010-0004
4010ES Extinguishing Release Applications	S4010-0005
4010ES Panels with Conventional Notification (INTL)	S4010-0006
4010ES Extinguishing Release Applications (INTL)	S4010-0007
InfoAlarm Command Center for the 4010ES Panels	S4010-0008
InfoAlarm Command Center for the 4010ES Panels (INTL)	S4010-0009
4010ES Panels with Addressable Notification (INTL)	S4010-0012
External 110 Ah Battery Charger for 4100ES, 4010ES	S4081-0002
Graphic I/O Modules for 4100ES, 4010ES, 4007ES	S4100-0005
Interface to VESDA Air Aspiration Detection Systems	S4100-0026
NDU with SPS Power Supplies for 4120 Network	S4100-0036
InfoAlarm Command Center with SPS Power Supplies	S4100-0045
Multiple Signal Fiber Optic Modems for 4120 Networks	S4100-0049
BACpac Ethernet Module	S4100-0051
4120 Network Products and Specifications	S4100-0056
Building Network Interface Card (BNIC)	S4100-0061
SafeLINC Internet Interface	S4100-0062
TrueInsight Remote Gateway	S4100-0063
ES Net Network Products and Specifications	S4100-0076
NDU with SPS Power Supplies for ES Net	S4100-0077
InfoAlarm Command Center with EPS Power Supplies	S4100-0101
NDU with EPS Power Supplies for 4120 Network	S4100-0102
NDU with EPS Power Supplies for ES Net	S4100-0104
120 VAC Remote Printer	S4190-0011
PC Annunciator	S4190-0013
TrueSite Workstation	S4190-0016
TrueSite Incident Commander	S4190-0020
SCU/RCU Annunciators	S4602-0001
4606-9102 Remote LCD Annunciator	S4606-0002